

BASO PYRAMID

SONATECH
Akustik + Schallschutz

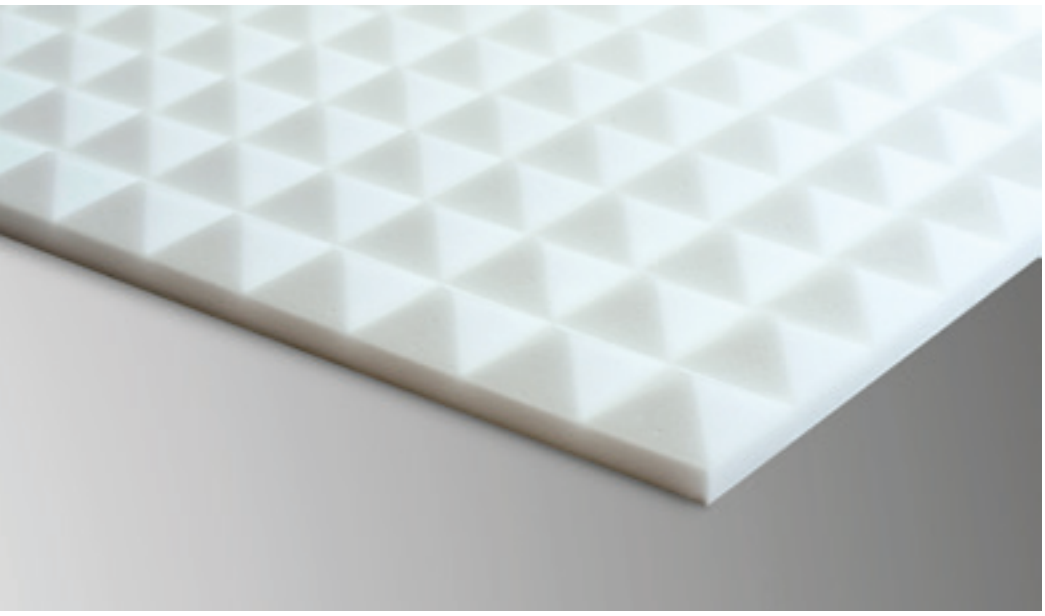

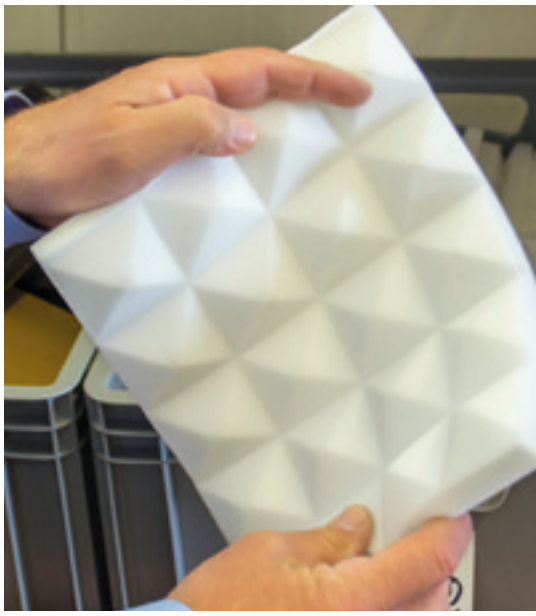

PRODUCT DESCRIPTION

Baso Pyramid is flexible, open cell foam with a considerable sound absorption capacity. Its most distinguishing feature is its excellent fire retardancy.

Baso Pyramid is particularly suitable for cases in which fire retardancy combined with good sound absorption is of importance.
Due to its very low density together with its high degree of sturdiness Baso Pyramid can also be used as a self-supporting element.

OUR SERVICE

- Expert consulting + sound measurement and acoustic layout on your premises in accordance with UVV "Lärm" (German accident prevention regulation), EU "Noise" guideline (2003/10/EG) and DIN 18041 within Germany on request
- Complete assembly within Germany

POSSIBLE APPLICATIONS


- Music practice rooms
- Offices and call centres
- Shooting ranges
- Machine and production halls

CHARACTERISTICS

- **Size** 1000 x 500 x 30 / 50 / 70 / 100 mm
- **Colour:** light grey and white
- UV resistant
- High degree of absorption
- Filigree, open-cell structure
- Available with self-adhesive layer
- **DIN 4102 B1 (high flame resistance)**

SOUND ABSORPTION DIN EN ISO 354

Sound absorption according to ISO 354:

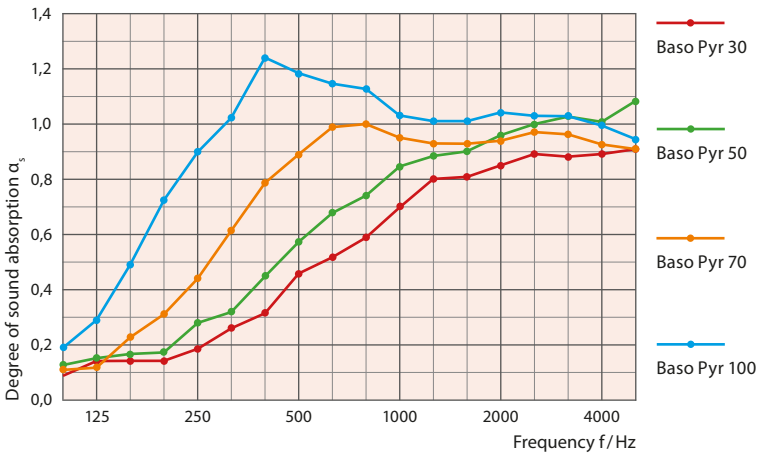

TECHNICAL DATA

Density	approx. 9 kg / m³
Temperature range	-40 °C – +150 °C
Burn behaviour	DIN 4102 B1
Sound absorption capacity	■ ■ ■
Cleaning	■
Durability	■
Fire retardancy	■ ■ ■