
PUR SKIN

SONATECH
Akustik + Schallschutz



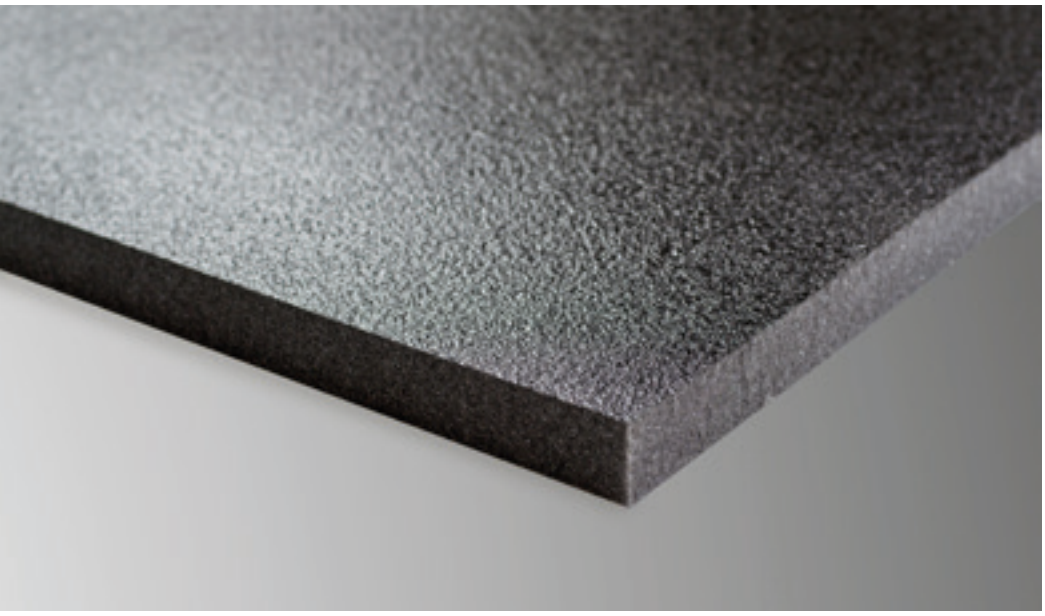

PRODUCT DESCRIPTION

Pur Skin is above all suitable where sound absorption is necessary in situations where soiling occurs.

POSSIBLE APPLICATIONS


- Compressors and aggregates
- Motor enclosers
- All kinds of finishing equipment

CHARACTERISTICS

- **Size:** 1000 x 500 x 10/30/50 mm
- **Colour:** black, Visible side: glossy black
- Surface protection provided by wear-resistant foil opens up a wide range of applications
- Available with self-adhesive layer or with bituminous foil and self-adhesive layer

SOUND ABSORPTION DIN EN ISO 354

Sound absorption according to ISO 354:

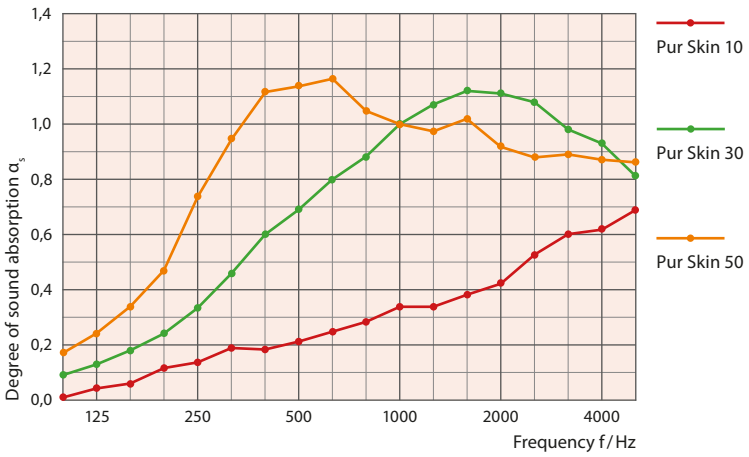

TECHNICAL DATA

Density	approx. 25–30 kg / m³
Burn behaviour	DIN 4102 B3 FMVSS 302
Temperature range	-40 °C – +100 °C
Sound absorption capacity	■ ■ ■
Cleaning	■ ■ ■
Durability	■ ■ ■
Fire retardancy	■ ■