
BITUMINOUS FOIL BF/2.0 SK

SONATECH
Akustik + Schallschutz

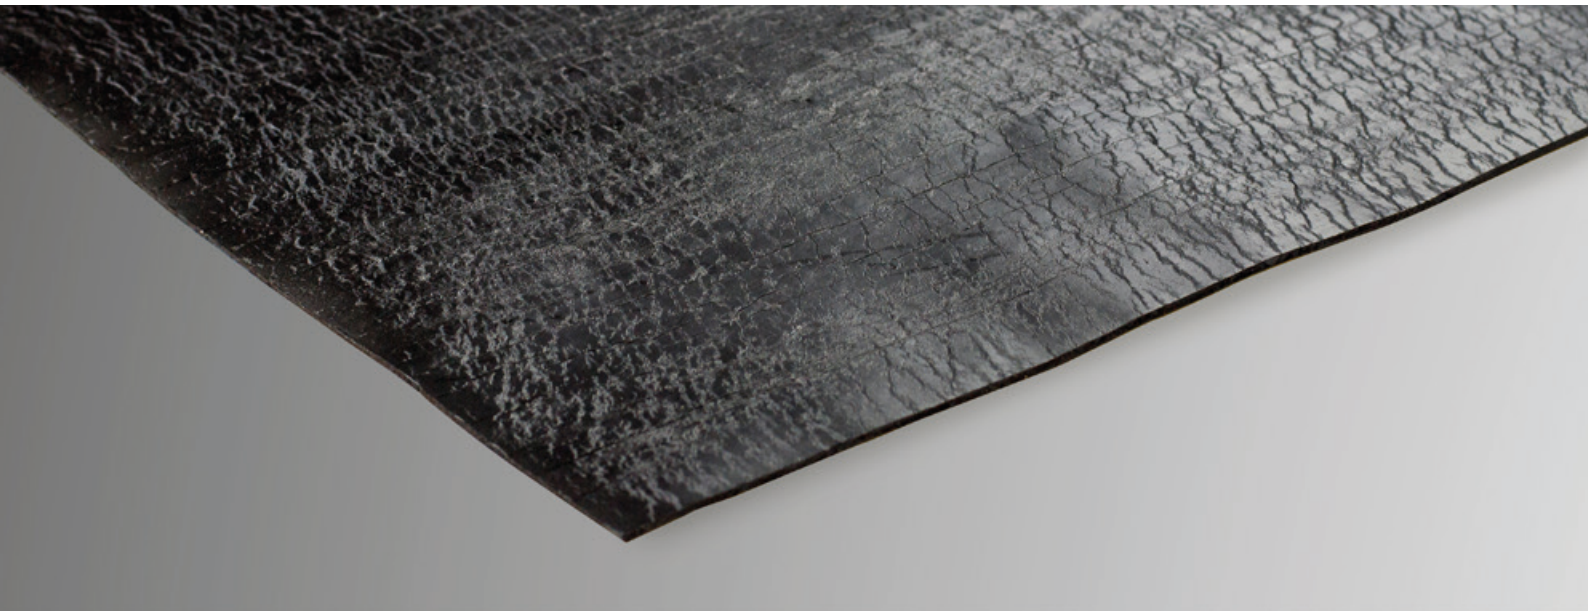

PRODUCT DESCRIPTION

Bituminous Foil BF/2.0 SK is used for structure-borne noise dampening (vibration dampening). BF/ 2.0 SK is mainly stuck onto sheet metal in order to increase structure-borne noise dampening and air noise insulation.

Bituminous Foil BF/2.0 SK is a self-adhesive elastomer-modified bituminous foil for dampening and insulating sheet metal and metal parts. Due to its composition it has excellent dampening qualities, even at low temperatures. BF/ 2.0 SK is clean and straightforward to assemble, elastic and not sensitive to pressure. It is clean and non-greasy. BF/ 2.0 SK is self-adhesive; we recommend additional support for vertical and overhead assembly.

POSSIBLE APPLICATIONS

- Noise-protective hoods (mechanical engineering)
- Computer casings
- Vehicles

CHARACTERISTICS

- Vibration dampening
- Increases air noise insulation
- Can be combined with air noise absorbers e.g. with Pur Sinus SK or Pur Skin SK

TECHNICAL DATA

Sound absorption capacity	■ ■
Cleaning	■ ■
Durability	■ ■ ■
Fire retardancy	■ ■
Weight	3.6 kg/sqm
Temperature range	-20 °C to +80 °C
Burn behaviour	FMVSS 302, DIN 75200, DIN 4102 B2;