pure TRIAD

SONATECH
Akustik + Schallschutz





PRODUCT DESCRIPTION

SONATECH pure Triad can be used to create optical and acoustic zoning. The transfer of the bothersome sound of voices is reduced and at the same time the depth of the room is maintained.

The pendant absorber is suspended from the ceiling and can consequently be used in rooms where it is not possible to attach any absorbent surfaces to the ceiling or walls. Colours can be selected to suit individual rooms and preferences.

MAIN AREAS OF APPLICATION

- Open-plan offices
- Offices with long reverberation time
- Acoustic zoning

POSSIBLE APPLICATIONS


- Offices / open-plan offices

CHARACTERISTICS

- **Size:** H 1800 x W 1500 mm x T 25 mm
- **Colour:** as per colour chart
- **Material:** fibre (recyclable)
- **Rounded corners**
- **Easy to assemble / remove**

SOUND ABSORPTION DIN EN ISO 354

Sound absorption according to ISO 354:

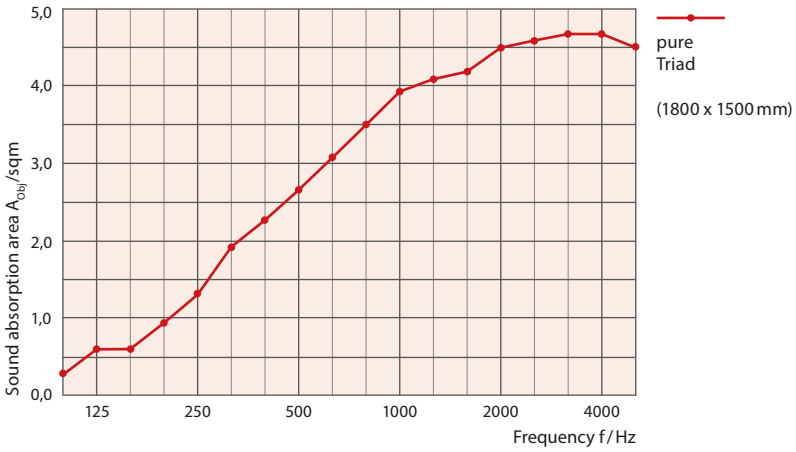

TECHNICAL DATA

Weight	4 kg/sqm
Fire behaviour	DIN 4102 B1 (without colour)
Sound absorption capacity	■ ■ ■
Cleaning	■ ■ ■
Durability	■ ■ ■
Fire retardancy	■ ■